



HONDA

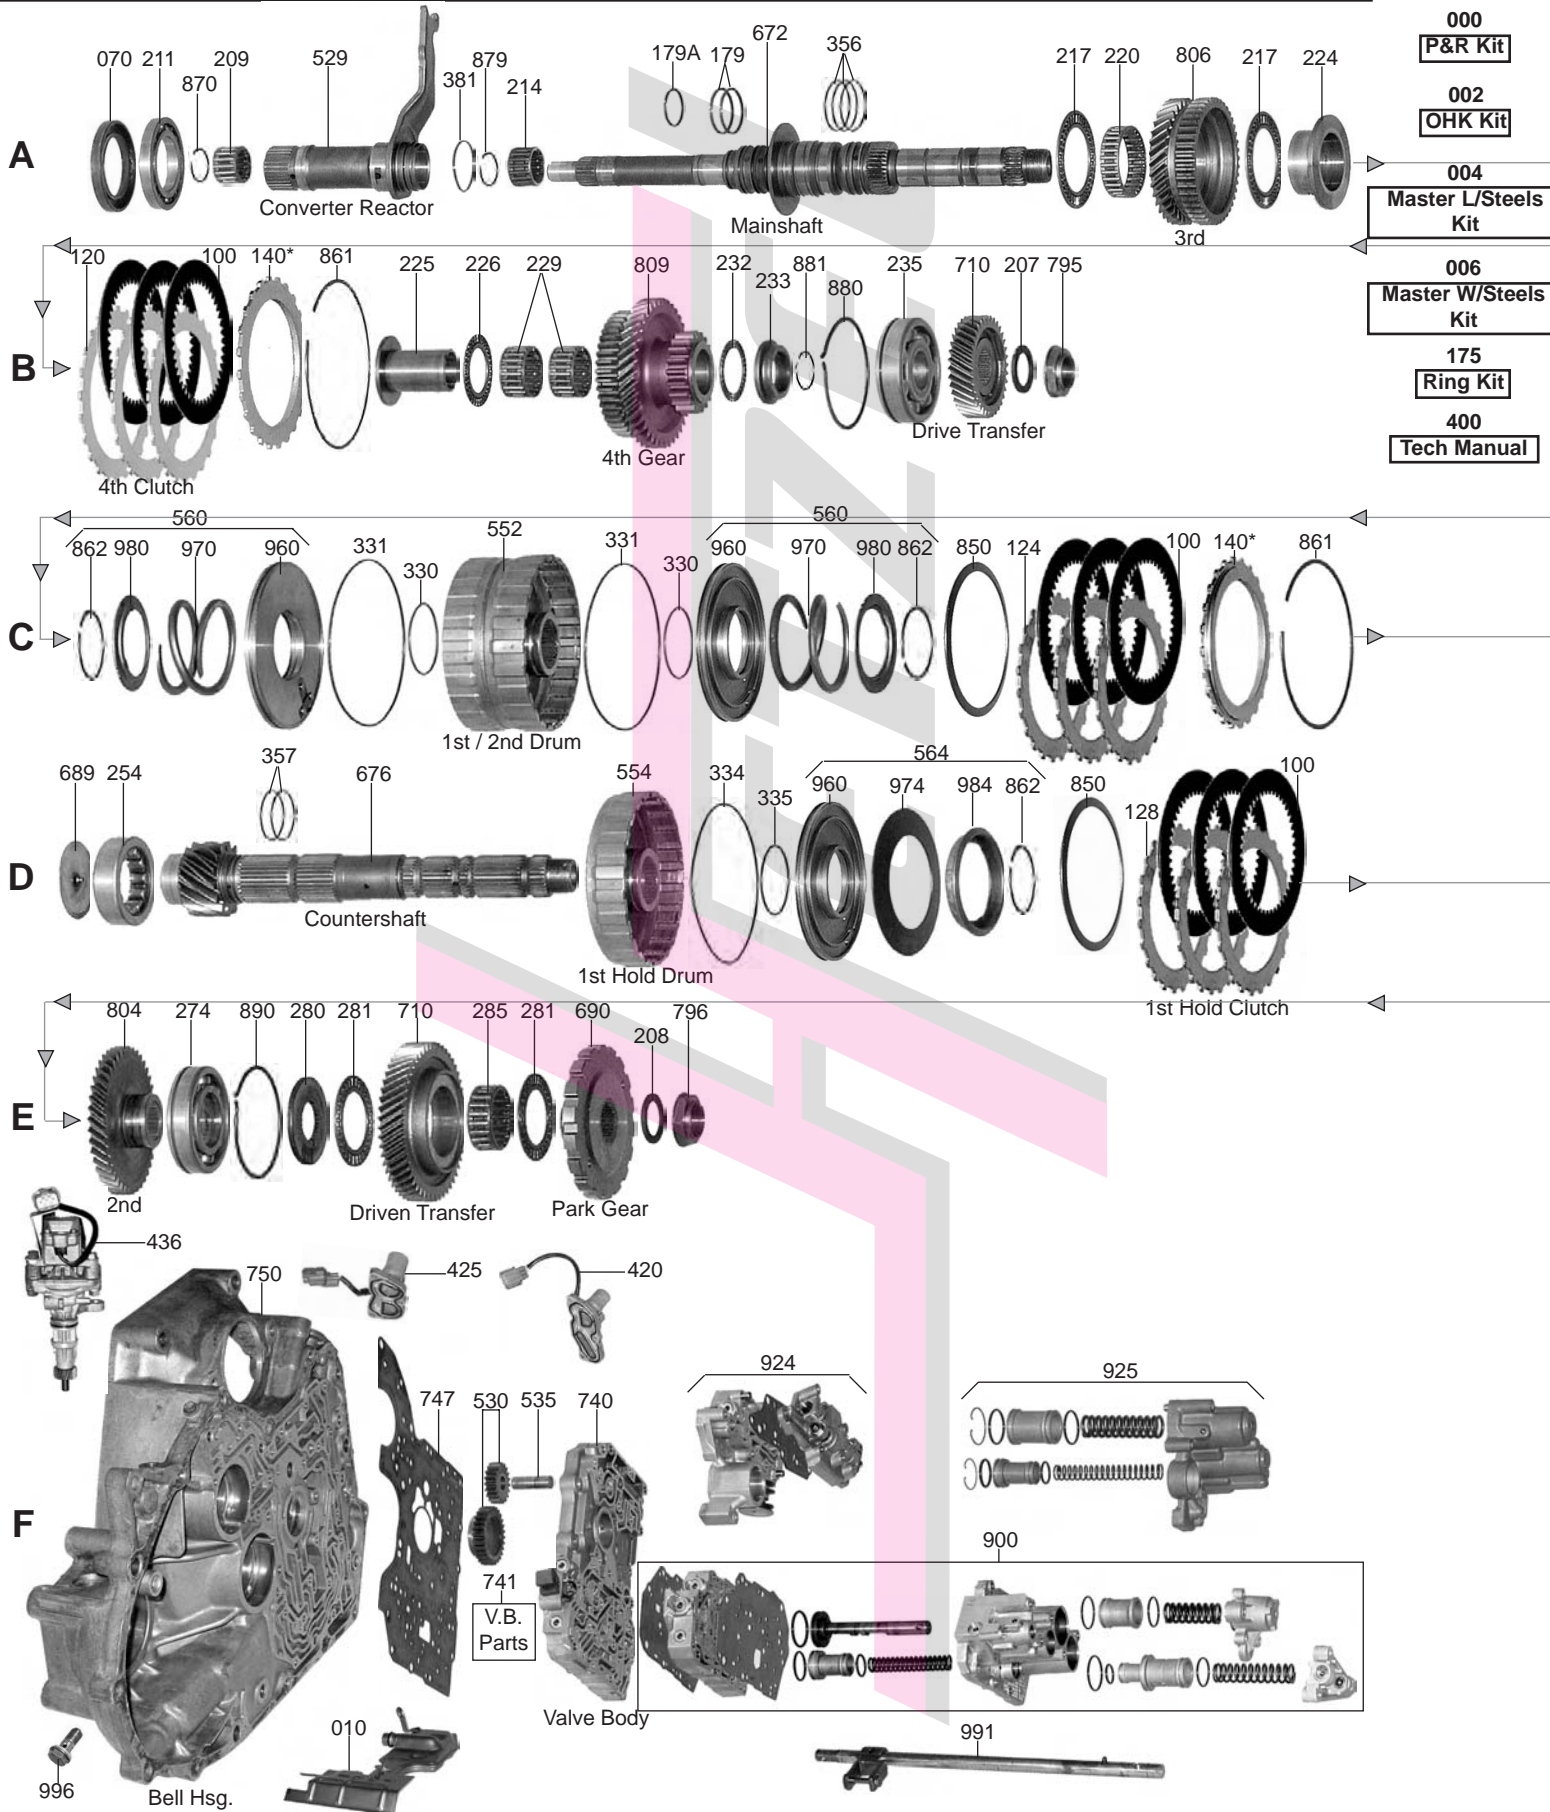

# FWD 4 Speed

PX4B / AOYA / APXA / APX4 / A6VA / BOYA / MP1A / MPOA / MPXA / MPWA (Accord)

HONDA

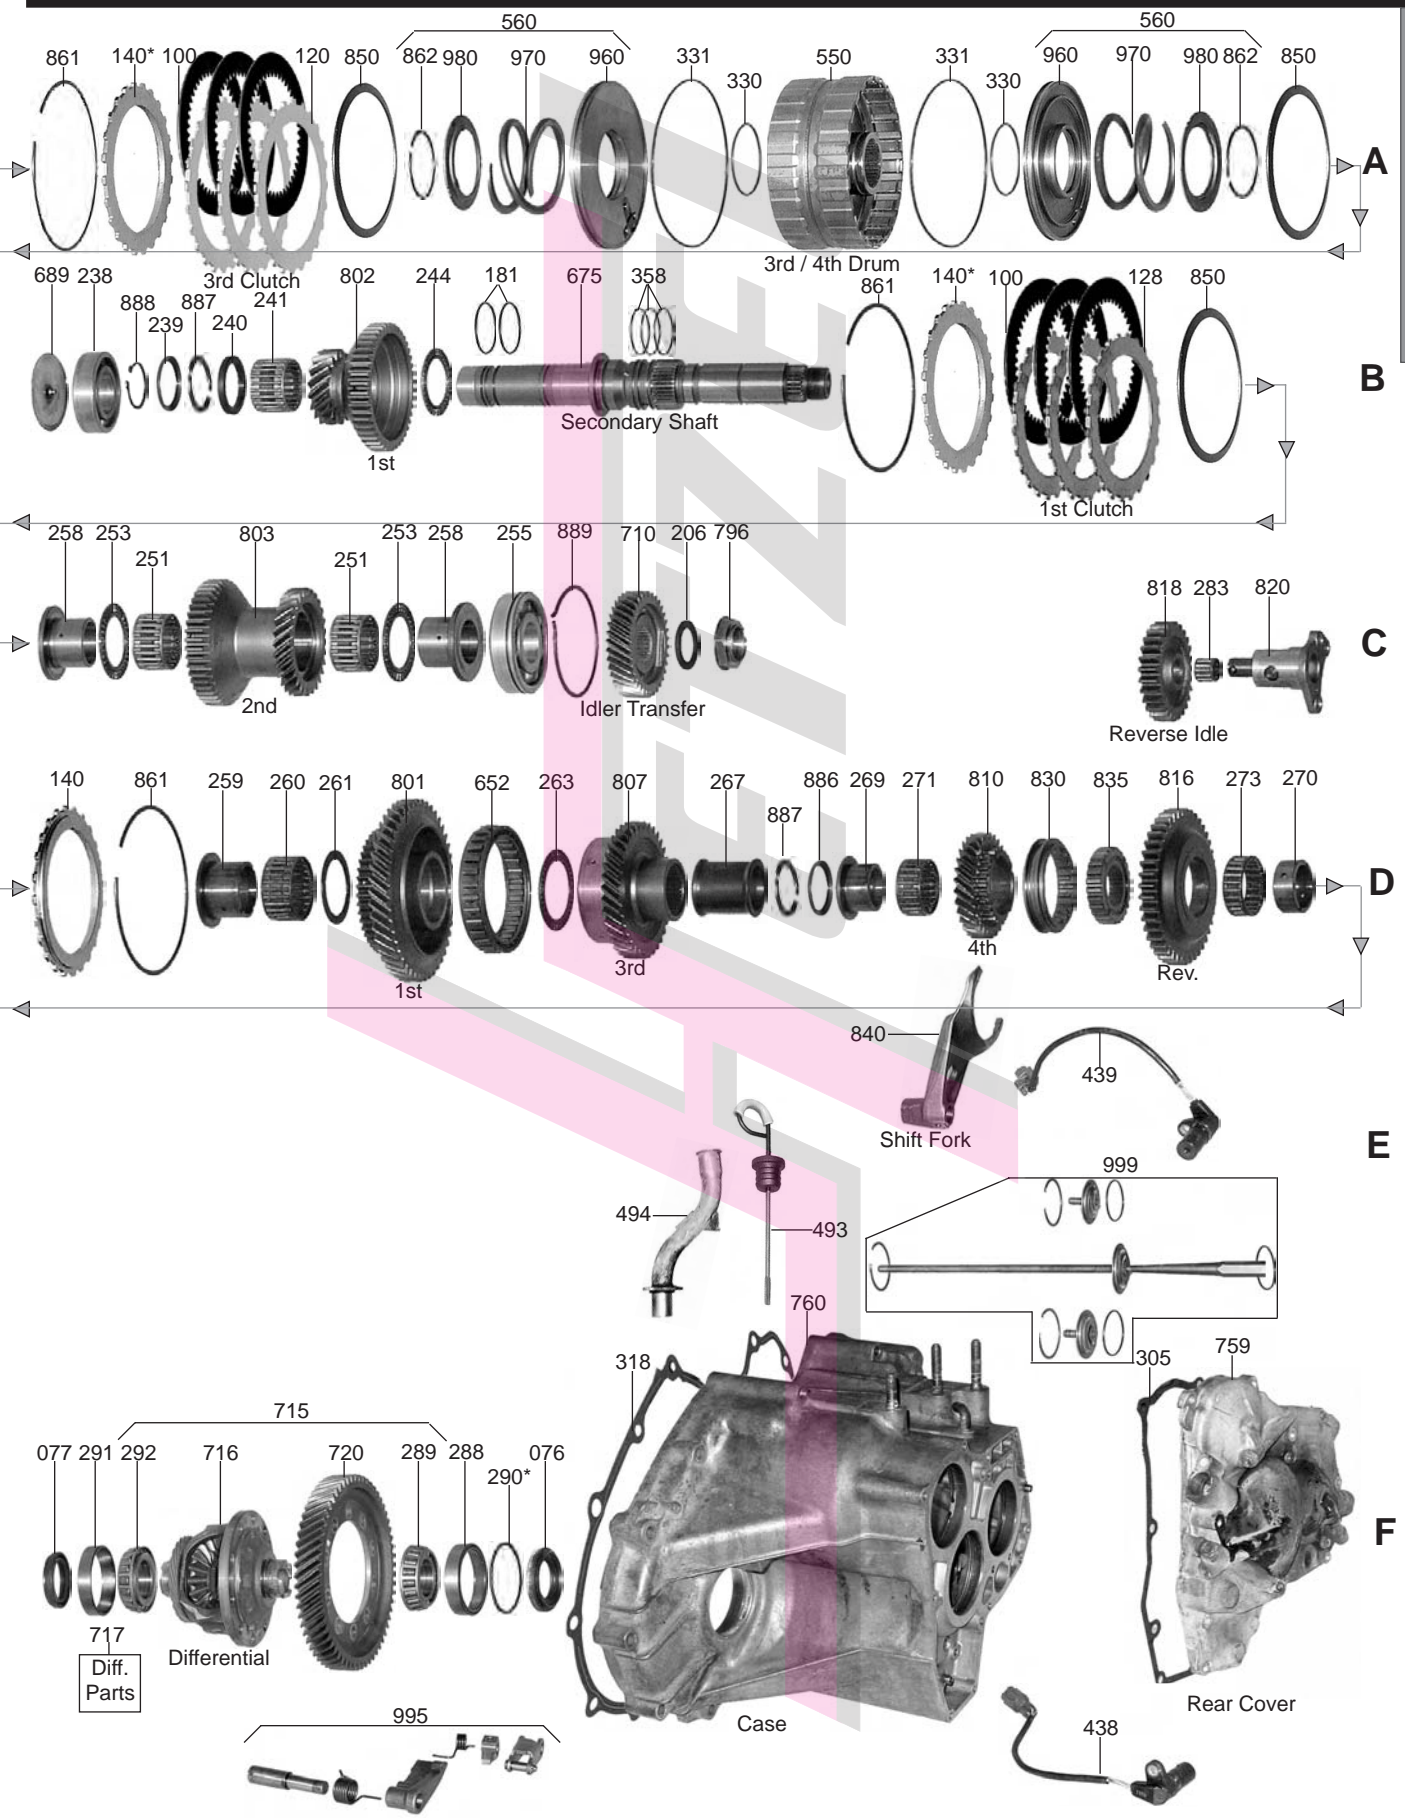


PART #	PAPER & RUBBER KIT	QTY.	REFERENCE #
80000A	Paper & Rubber Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPOA/MPWA (Accord)/MPXA 1990-97 (Accord 1990-97) (Prelude 1992-96) (Odyssey 1995-97) (Acura 2.2 CL 1997) (Isuzu Oasis 1995-97 & 1999)	1	

PART #	OVERHAUL KITS	QTY.	REFERENCE #
80002A	Overhaul Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPOA/MPWA (Accord)/MPXA 1990-97 (Accord 1990-97) (Prelude 1992-96) (Odyssey 1995-97) (Acura 2.2 CL 1997) (Isuzu Oasis 1995-97 & 1999)	1	

PART #	MASTER L/STEEL KIT	QTY.	REFERENCE #
80004A	Master L/Steels Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1990-97 (Accord 1990-97) (Prelude 1992-96) (Odyssey 1995-97) (Acura 2.2 CL 1997) (Isuzu Oasis 1995-97 & 1999)	1	

PART #	MASTER W/STEEL KIT	QTY.	REFERENCE #
80006A	Master W/Steels Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MPJA/MPOA/MPWA (Accord)/MPXA 1990-97 (Accord 1990-97) (Prelude 1992-96) (Odyssey 1995-97) (Acura 2.2 CL 1997) (Isuzu Oasis 1995-97 & 1999)	1	
80006B	Master W/Steels Kit, MP1A (Prelude) 1992-96	1	

PART #	FILTER	QY.	REFERENE #
80010	Filer, PX4B 199-91	1	
80010A	Filter, AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA	1	

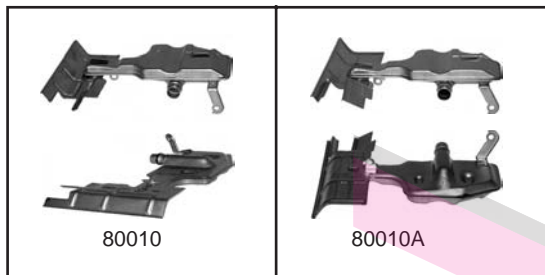

70018C	Screen, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MPJA/MPOA/MPWA/MPXA (Some) (In Valve Body) (.570"OD) (.125" Thick Rubber Boot)	1	
70018CA	Screen, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MPJA/MPOA/MPWA/MPXA (Some) (In Valve Body) (.662"OD) (.315" Thick Rubber Boot)	1	

PART #	METAL CLAD SEALS	QTY.	REFERENCE #
60070A	Seal, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Converter (44x68x8mm) Counter Clockwise Helix	1	
60072	Seal, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Manual Shaft	1	
80076	Seal, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Axle (Case Side) (40x66x9mm)	1	
60077H	Seal, APXA/APX4/AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA/PX4B Axle (Bell Side) (40x56x9mm)	1	

PART #	FRICTION CLUTCH	QTY.	REFERENCE #
80100A	Friction, PX4B/AOYA/APXA/APX4/A6VA/ BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA All Clutch Packs (.076) 44 Teeth (3 Frictions Each, Except MP1A Has 4 In 2nd Clutch Pack)	3-16	
80119S1	Friction Module, AOYA/APXA/BOYA/MPJA/MPXA/PX4B 1990-97 (Stage 1)	1	



PART #	STEEL CLUTCH	QTY.	REFERENCE #
80120A	Steel, AOYA/APXA/ BOYA/MP1A/MPJA/MPXA/PX4B/MPOA/A6VA (.091") 24 Teeth (3.70"ID) ..	3-6	
80124	Steel, AOYA/APXA/BOYA/MPJA/MPXA/PX4B/MPOA/A6VA 2nd Clutch (.102") 24 Teeth (For MP1A Use 80128A) ..	3	
80128A	Steel, PX4B/APXA/APX4/MP1A/MPOA/MPWA (Accord)/MPXA 1st Hold Clutch (.079") 24 Teeth (Also Fits MP1A 2nd Clutch Takes 4 Steels) ..	3-7	
80128AB	Steel, AOYA/BOYA/MPJA/A6VA 1st Clutch (.061") 24 Teeth ..	3	
80128B	Steel, PX4B/AOYA/APXA/BOYA/MP1A/MPJA/MPXA 1st Clutch (.070") 24 Teeth (Also Fits PX4B/APXA/MP1A/MPXA 1st Hold Clutch) (.009" Undersized To Adjust Clutch Pack) ..	3	

PART #	CLUTCH PRESSURE PLATES	QTY.	REFERENCE #
80140AA	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#1) (.082") (24 Teeth) ..	1-5	
80140AB	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#2) (.086") (24 Teeth) ..	1-5	
80140AC	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#3) (.090") (24 Teeth) ..	1-5	
80140AD	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#4) (.094") (24 Teeth) ..	1-5	
80140AE	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#5) (.098") (24 Teeth) ..	1-5	
80140AF	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#6) (.102") (24 Teeth) ..	1-5	
80140AG	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#7) (.106") (24 Teeth) ..	1-5	
80140AH	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#8) (.110") (24 Teeth) ..	1-5	
80140AJ	Pressure Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th/1st Hold Clutch (#9) (.114") (24 Teeth) ..	1-5	

PART #	OIL SEALING RINGS	QTY.	REFERENCE #
80175A	Ring Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA ..	1	

PART #	WASHERS & BEARINGS	QTY.	REFERENCE #
80206	Washer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Under Secondary Shaft (Use 80207A) ..	1	
80207A	Washer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Under Mainshaft, Secondary Shaft & Countershaft Nuts ..	1-3	
80208	Washer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Under Counter-Shaft (Use 80207A) ..	1	
80209	Caged Needle Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Stator (Front) (1.040"OD) ..	1	
80211	Ball Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Bell Housing To Converter (2.675"OD) ..	1	
80214	Caged Needle Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Front (Mainshaft) ..	1	
80217	Thrust Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Mainshaft To 2nd Gear ..	1	
80220	Caged Needle Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Mainshaft To 2nd Gear (Inner) ..	1	
80224	Collar W/Race, APXA/PX4B 3rd Gear (Mainshaft) ..	1	
80224A	Collar W/Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA 3rd Gear (Mainshaft) ..	1	
80225	Collar W/Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear (Mainshaft) ..	1	
80226	Thrust Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Collar To 4th Gear (Mainshaft) (Use 80253A) ..	1	
80229	Caged Needle Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear (Inner) (Mainshaft) ..	2	
80232	Thrust Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear To Race (Mainshaft) ..	1	
80233	Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear To Snap Ring (Mainshaft) ..	1	

PART #	WASHERS & BEARINGS (Continued)	QTY.	REFERENCE #
80235	Ball Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Mainshaft To Case (Use 80255AA)	1	
80238	Ball Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Bell Housing To Secondary Shaft (2.365"OD) (1.220"ID)	1	
80239	Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Snap Ring To Split Washer (Secondary Shaft)	1	
80240	Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Split Washer To 1st Gear (Secondary Shaft)	1	
80241	Caged Needle Bearing, PX4B/APXA/APX4/MP1A/MPWA (Accord)/MPXA 1st Gear To Mainshaft (23 Needles)	1	
80241A	Caged Needle Bearing, AOYA/A6VA/BOYA/MPJA/MPOA 1st Gear To Mainshaft (28 Needles)	1	
80244	Thrust Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st Gear To 1st/2nd Drum (Secondary Shaft)	1	
80251	Caged Needle Bearing, PX4B/APXA/APX4 2nd Gear To Rear Race (.945" Tall) (Secondary Shaft)	2	
80251A	Caged Needle Bearing, AOYA/A6VA/BOYA/MPJA/MPOA 2nd Gear To Rear Race (1.035" Tall) (Secondary Shaft)	2	
80251AA	Caged Needle Bearing, MP1A/MPWA (Accord)MPXA 2nd Gear To Rear Race (.925" Tall) (Secondary Shaft)	2	
80253	Thrust Bearing, PX4B/APXA/APX4 2nd Gear (Both Sides) (2.200"OD) (1.422"ID) (Secondary Shaft)	2	
80253A	Thrust Bearing, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear (2.115"OD) Both Sides (Secondary Shaft) (Also Fits PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A /MPJA/MPOA/MPWA (Accord) & MPXA Collar To 4th Gear (Mainshaft)	2-3	
80254	Caged Roller Bearing, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Bell Housing To Counter Shaft	1	
80255	Ball Bearing, APXA/PX4B Secondary Shaft To Case (1.140"ID)	1	
80255A	Ball Bearing, AOYA/A6VA/BOYA/MPJA/MPOA Secondary Shaft To Case (1.065"ID) (12 Balls)	1	
80255AA	Ball Bearing, MP1A/MPXA/MPOA/A6VA Secondary Shaft To Case (1.065"ID) (7 Balls)	1	
80258	Collar W/Race, PX4B/APXA/APX4 2nd Gear (Both Sides) (Secondary Shaft)	2	
80258A	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.172" Thick) (With 2 Notches On ID) (Secondary Shaft)	1	
80258AA	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.159" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AB	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.161" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AC	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.163" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AD	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.165" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AE	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.167" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AF	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.169" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AG	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.171" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AH	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.173" Thick) (With Splines On ID) (Secondary Shaft)	1	
80258AJ	Race, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 2nd Gear To 1st/2nd Drum (.175" Thick) (With Splines On ID) (Secondary Shaft)	1	
80259	Collar W/Race, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st Hold Drum To 1st Gear (1.375"ID) (Countershaft)	1	
80260	Caged Needle Bearing, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st Gear To Collar (Countershaft)	1	
80261	Race, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Caged Needle Bearing To Thrust Bearing (.057" Thick) (With 2 Notches On ID) (Countershaft)	1	
80263	Thrust Bearing, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st Gear To 3rd Gear (1.620"ID) (Countershaft)	1	
80267	Collar, PX4B/APXA/APX4 3rd Gear To 4th Gear (1.810" Long) (Countershaft)	1	
80267A	Collar, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 3rd Gear To 4th Gear (1.560" Long) (Countershaft)	1	
80269	Collar W/Race, PX4B/APXA/APX4 4th Gear (.945" Thick) (Countershaft)	1	
80269A	Stepped Race, AOYAA6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear (.310" Thick) (Countershaft)	1	
80270	Collar, PX4B/APXA/APX4 Reverse Gear (Countershaft)	1	
80271	Caged Needle Bearing, PX4B/APXA/APX4 4th Gear (.770" Thick) (Countershaft)	1	
80271A	Caged Bearing, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 4th Gear (.935" Thick) (Countershaft)	1	

80273.....	Caged Needle Bearing, PX4B/AOYA/APXAAPX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Reverse Gear (.580" Thick) (Countershaft) .....	1
80274.....	Ball Bearing, PX4B/APXA/APX4 Countershaft To Case (1.580"ID).....	1
80274A.....	Ball Bearing, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Countershaft To Case (1.140"ID).....	1
80280.....	Race W/Inner Splines, PX4B/APXA/APX4 Driven Transfer Gear (Countershaft) (.155" Thick).....	1
80280A.....	Race W/Inner Splines, AOYA/BOYA/MPJA Driven Transfer Gear (Countershaft) (.135" Thick).....	1
80280AA.....	Race W/Inner Splines, A6VA/MP1A/MPOA/MPWA (Accord)/MPXA Driven Transfer Gear (Countershaft) (.138" Thick) .....	1
80281.....	Thrust Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Driven Transfer Gear (Both Sides) (Countershaft) .....	2
80283.....	Caged Needle Bearing, P4XB/APXA/APX4/MP1A/MPWA (Accord)/MPXA Reverse Idler (14 Needles).....	1
80283A.....	Caged Bearing, AOYA/A6VA/BOYA/MPJA/MPOA Reverse Idler (12 Needles) .....	1
80285.....	Caged Needle Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Driven Transfer Gear (.730" Thick) (Countershaft).....	1
80288.....	Cup Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Differential To Case.....	1
80289.....	Cone Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Differential To Case.....	1
80291.....	Cup Race, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Differential To Bell Housing .....	1
80292.....	Cone Bearing, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Differential To Bell Housing .....	1

**PART # GASKETS & RUBBER COMPONENTS QTY. REFERENCE #**

80305.....	Gasket, PX4B Rear Cover (Can Use 80305A) .....	1
80305A.....	Gasket, AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Rear Cover.....	1
60313A.....	O-Ring, Honda Converter (OE Upgraded)(Fits On ConverterHub, Inside Of Drive Pump Gear) ...	1
80318.....	Gasket, PX4B/AOYA/APXA/APX4/BOYA/MP1A/MPJA Bell Housing To Case .....	1

**PART # TECHNICAL MANUALS QTY. REFERENCE #**

80400.....	Technical Manual, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA.....	1
80401.....	Technical Manual On CD, AOYA/APXA/BOYA/MP1A/PX4B.....	1

**PART # ELECTRICAL COMPONENTS QTY. REFERENCE #**

80410D.....	Switch, MPJA Neutral Safety (On Rear Cover).....	1
30411E.....	Switch, MPJA 2nd & 3rd Clutch Pressure (Screws In Bell Housing)(Green Connector)(Flat) (38 PSI) .....	1
80420.....	Solenoid Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Shift Solenoid (On Outside Of Bell At 3:00) (Aluminum Base Is 4 1/4") .....	1
80425.....	Dual Solenoid, AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA/PX4B Lock-Up (On Outside Of Bell At 1:00) (Aluminum Base Is 3 1/2" Long) (W/2 Oval Shaped O-Rings) (Can Use 30425C).....	1
80436.....	Speed Sensor, PX4B/MP1A Vehicle (3 Prong Grey Connector & Wire Harness).....	1
80436A.....	Speed Sensor, AOYA/A6VA/BOYA/MPJA/MPOA Vehicle (3 Prong Black Connector) (No Wire Harness).....	1
80436AA.....	Speed Sensor, APXA Vehicle (3 Prong Black Connector) (No Wire Harness).....	1
80438.....	Speed Sensor, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (NC) (Grey Connector) (On Rear Cover).....	1
80439.....	Speed Sensor, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (NM) (Green Connector) (On Rear Cover) .....	1

**PART # MISC. COMPONENTS QTY. REFERENCE #**

80481.....	Spring Set, PX4B/APXA/MP1A/MPXA Reverse Idler Shaft (Contains: 2 Springs, 1 Check Ball, 1 Spring Cap) .....	1
80485L.....	Dowel Pin, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Case To Bell To Regulator Or Servo Assembly .....	2
80485S.....	Dowel Pin, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Valve Body .....	2
30492A.....	Drain Plug, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA .....	1
80493.....	Dip Stick, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (7" Long).....	1

PART #	MISC. COMPONENTS (Continued)	QTY.	REFERENCE #
80496	Cooler Line, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (Metal) (7" Long) (Fitting Holds This To The Bell Housing)	1	
80496A	Cooler Line, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (Metal) (20 1/2" Long) (Fitting Holds This To The Bell Housing)	1	
PART #	HARD PARTS	QTY.	REFERENCE #
80529	Stator Tube, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (Cast # XL4 Or X4Y)	1	
60530C	Pump Gear Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (38 Spline Gear) 28 Teeth (.470" Thick)	1	
80535	Pin, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Pump Gear	1	
80550	Drum, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 3rd/4th Clutch	1	
80552	Drum, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd Clutch	1	
80552A	Drum, MP1A 1st/2nd Clutch (Holds 4 Clutches In 2nd Clutch Pack)	1	
80554	Drum, PX4B/APXA/APX4/MP1A/MPXA 1st Hold Clutch (Machined Steel)	1	
80554A	Drum, AOYA/A6VA/BOYA/MPJA/MPOA 1st Hold Clutch (Stamped Steel)	1	
80560	Piston Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st/2nd/3rd/4th Clutch	1-4	
80564	Piston Kit, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA 1st Hold Clutch	1	
80652	Sprag, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (Use 80801)	1	
80672	Mainshaft, PX4B/APXA/APX4 (15 1/8" Long) (1.575"OD Where # 224 Rides)	1	
80672A	Mainshaft, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (15 1/8" Long) (1.530"OD Where #224 Rides)	1	
80675	Secondary Shaft, AOYA/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (.230" Thick Center Flange)	1	
80675A	Secondary Shaft, PX4B/APXA/APX4 (.170" Thick Center Flange)	1	
80676	Countershaft, MPXA (14 Teeth / No Groove) (6 Set Of Splines)	1	
80676A	Countershaft, PX4B/APXA (14 Teeth / No Groove) (7 Sets Of Splines)	1	
80676AA	Countershaft, MP1A (14 Teeth / 1 Groove In Center) (6 Sets Of Splines)	1	
80676AB	Countershaft, A6VA/MPJA (14 Teeth / 1 Groove By Bearing) (6 Sets Of Splines)	1	
80676AC	Countershaft, AOYA/BOYA/MPOA (15 Teeth / 1 Groove) (6 Sets Of Splines)	1	
80689A	Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Oil (Sets In Bell Housing Under Pinion Bearing)	1	
80689AS	Plate, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA Oil (Sets In Bell Housing Under Secondary Shaft Bearing)	1	
80690	Gear, PX4B/APXA/APX4/BOYA/MP1A/MPXA Park (Countershaft) With 2 Sets Of Splines (Can Use 80690A)	1	
80690A	Gear, AOYA/A6VA/MPJA/MPOA Park (Countershaft) With 1 Set Of Splines (Can Use 80690)	1	
80710AAK	Gear Set, AOYA/A6VA/BOYA/MPJA/MPOA Transfer (3 Gear Set) 1990-00 (36 Teeth Mainshaft, 52 Teeth Countershaft & 36 Teeth Secondary Shaft)	1	
80710ABK	Gear Set, MP1A/MPXA Transfer (3 Gear Set) 1990-00 (35 Teeth Mainshaft, 52 Teeth Countershaft & 35 Teeth Secondary Shaft)	1	
80710AK	Gear Set, PX4B/APXA Transfer (3 Gear Set) 1990-00 (35 Teeth Mainshaft, 51 Teeth Countershaft & 35 Teeth Secondary Shaft)	1	
80715	Differential Assembly, PX4B (60 Teeth / 2 Groove) (Silver Cross Pin)	1	
80715A	Differential Assembly, APXA/MPXA (60 Teeth / 2 Groove) (Gold Cross Pin)	1	
80715AA	Differential Assembly, AOYA/BOYA/MPOA (62 Teeth / 1 Groove Close To Center)	1	
80715AB	Differential Assembly, MP1A (62 Teeth / 1 Groove By Bearing)	1	
80715AC	Differential Assembly, MPJA (62 Teeth / 1 Groove By Speed-O Gear)	1	
80715E	Differential Assembly, A6VA (60 Teeth / No Groove) (Gold Cross Pin)	1	
80717H-8	Cross Pin, APXA/A6VA/MPXA Differential Spider Gear (Gold Colored)	1	
80740	Valve Body, PX4B/APXA (Cast # PX4) With Detent (Less Pump Gears)	1	
80740A	Valve Body, AOYA/A6VA/BOYA/MPJA/MPOA (Cast # POX) No Detent (Less Pump Gears)	1	
80740B	Valve Body, MP1A/MPXA (Cast # PX4Y) No Detent (Less Pump Gears)	1	

PART #	VALVE BODY COMPONENTS	QTY.	REFERENCE #
80741-1	Valve & Spring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPWA (Accord)/MPXA (Converter Check Valve) (In Valve Body)	1	
80747	Separator Plate, PX4B/APXA/APX4/MP1A/MPXA (Valve Body)	1	
80747A	Separator Plate, AOYA/A6VA/BOYA/MPJA/MPOA (Valve Body)	1	



PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
80750	Bell Housing, PX4B	1	
80750A	Bell Housing, AOYA/A6VA/BOYA/MPOA	1	
80750AA	Bell Housing, APXA	1	
80750AB	Bell Housing, MP1A	1	
80750AC	Bell Housing, MPJA	1	
80750AD	Bell Housing, MPXA	1	
80759	Rear Cover, PX4B/APXA/APX4/MP1A/MPXA With Tubes (With 2 Threaded Holes For Tin Shield)	1	
80759A	Rear Cover, AOYA/A6VA/BOYA/MPOA With Tubes (No Threaded Holes For Tin Shield)	1	
80759AA	Rear Cover, MPJA With Tubes (No Threaded Holes Fro Tin Shield) Uses A Pressed In Ball Bearing	1	
80760	Case, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (Units W/Out Ring Type Idler Gear Pin (#819) Will Retro Fit If Idler Assembly Is With Case)	1	
80774	Speed-O Housing & Power Steering Pump, PX4B/APXA/APX4/MP1A (19 Teeth) (W/Out Sensor Or Connector)	1	
80774A	Speed-O Housing, AOYA/BOYA (19 Teeth) (W/Out Sensor Or Electric Connector)	1	
80774AA	Speed-O Housing, MPJA (18 Teeth) (W/Out Sensor Or Electric Connector)	1	
80774AB	Speed-O Housing & Power Steering Pump, PX4B/MP1A (19 Teeth Gear) (With 3 Prong Grey Connector And Wire Harness)	1	
80774AC	Speed-O Housing & Power Steering Pump, APXA (19 Teeth Gear) (With 3 Prong Black Connector) (No Wires)	1	
80774AD	Speed-O Housing, AOYA/BOYA (19 Teeth Gear) (With 3 Prong Black Connector) (No Wire Harness)	1	
80774AE	Speed-O Housing, MPJA (18 Teeth Gear) (With 3 Prong Black Connector) (No Wire Harness)	1	
80776K	Bolt Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Case To Bell	1	
80780K	Bolt Set, PX4B/AOYA/APXA/APX4/BOYA/MP1A/MPJA/MPXA Rear Cover	1	
80782K	Bolt Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Valve Body To Bell (4 Bolts)	1	
80783K	Bolt Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1-2 Accumulator Body (6 Bolts)	1	
80784K	Bolt Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Throttle & Regulator Body (8 Bolts)	1	
80795	Nut, PX4B/AOYA/APXA/APX4/A6VA/ BOYA/MP1A/MPJA/MPOA/MPXA (Mainshaft) (Left Hand Threads)	1	
80795K	Nut Set, PX4B/AOYA/APXA/APX4/A6VA/ BOYA/MP1A/MPJA/MPOA/MPXA (Mainshaft) (Nut & Washer)	1	
80796	Nut, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (Countershaft & Secondary Shaft) (Right Hand Thread)	1-2	
80796K	Nut Set, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (Countershaft & Secondary Shaft) (With Various Bolts, O-Rings & Rear Gasket)	1	
80801	Gear, PX4B/APXA/APX4/MP1A/MPXA 1st Hold (46 Teeth / No Groove) (With Sprag)	1	
80801AD	Gear, AOYA/A6VA/BOYA/MPJA/MPOA 1st Gear (52 Teeth / No Groove) (With Sprag)	1	
80802	Gear, PX4B/APXA/APX4 1st (17 Teeth / No Groove) (Secondary Shaft)	1	
80802A	Gear, MP1A/MPXA 1st (17 Teeth / 1 Groove) (Secondary Shaft)	1	
80802AC	Gear, AOYA/A6VA/BOYA/MPJA/MPOA 1st (19 Teeth / No Groove) (Secondary Shaft)	1	
80803	Gear, PX4B/APXA/APX4 2nd (28 Teeth) (1.660"ID) (Secondary Shaft)	1	
80803A	Gear, MP1A 2nd (28 Teeth / 1 Groove) (1.460"ID) (Secondary Shaft)	1	
80803AA	Gear, MPXA 2nd (29 Teeth / No Groove) (1.460"ID) (Secondary Shaft)	1	
80803AC	Gear, MPJA 2nd (30 Teeth / 3 Groove) (1.460"ID) (Secondary Shaft)	1	
80803AE	Gear, AOYA/A6VA/BOYA/MPOA 2nd (31 Teeth / No Groove) (Secondary Shaft)	1	
80804	Gear, PX4B/APXA/APX4 2nd (41 Teeth / No Groove) (Countershaft) (4 Slots)	1	
80804AC	Gear, MP1A 2nd (43 Teeth / 2 Groove) (Countershaft) (4 Slots)	1	
80804AD	Gear, MPXA 2nd (43 Teeth / No Groove) (Countershaft) (4 Slots)	1	
80804AG	Gear, AOYA/A6VA/BOYA/MPOA 2nd (43 Teeth / 1 Groove) (Countershaft)	1	
80804AJ	Gear, MPJA 2nd (47 Teeth / 2 Groove) (Countershaft)	1	
80806	Gear, MPXA 3rd (35 Teeth)(1 Groove)(Mainshaft)	1	
80806A	Gear, MP1A 3rd (35 Teeth)(2 Groove)(Mainshaft)	1	
80806AA	Gear, PX4B 3rd (35 Teeth)(No Groove)(Mainshaft)	1	
80806AB	Gear, APXA 3rd (35 Teeth)(3 Groove)(Mainshaft)	1	
80806AG	Gear, MPJA 3rd (37 Teeth)(3 Groove)(Mainshaft)	1	
80806AJ	Gear, AOYA/BOYA/MPOA/A6VA 3rd (38 Teeth)(No Groove)(Mainshaft)	1	
80807	Gear, PX4B/MPXA 3rd (36 Teeth / No Groove) (Countershaft)	1	
80807AD	Gear, APXA/APX4/MP1A 3rd (37 Teeth / 2 Groove) (Countershaft)	1	
80807AG	Gear, AOYA/A6VA/BOYA/MPOA 3rd (39 Teeth / No Groove) (Countershaft)	1	
80807AJ	Gear, MPJA 3rd (40 Teeth / 3 Groove) (Countershaft)	1	



PART #	HARD PARTS (Continued)	QTY.	REFERENCE #
80809AA	Gear, MP1A 4th (40 Teeth / No Groove) (Mainshaft)	1	
80809AD	Gear, MPJA 4th (41 Teeth / No Groove) (Mainshaft)	1	
80809AE	Gear, MPXA 4th (41 Teeth / 1 Groove) (Mainshaft)	1	
80809AJ	Gear, PX4B/AOYA/APXA/APX4/BOYA 4th (43 Teeth / 1 Groove) (Mainshaft)	1	
80810A	Gear, PX4B 4th (29 Teeth / 1 Groove) (1.655"ID) (Countershaft)	1	
80810AA	Gear, AOYA/A6VA/BOYA/MPOA 4th (29 Teeth / 1 Groove) (1.500"ID) (Countershaft)	1	
80810AB	Gear, PX4B/APXA/APX4 4th (29 Teeth / 2 Groove) (1.655"ID) (Countershaft)	1	
80810AD	Gear, MPXA 4th (29 Teeth / 2 Groove) (1.500"ID) (Countershaft)	1	
80810AE	Gear, APXA 4th (30 Teeth / No Groove) (1.655"ID) (Countershaft)	1	
80810AG	Gear, MPJA 4th (30 Teeth / No Groove) (1.500"ID) (Countershaft)	1	
80810AJ	Gear, MP1A 4th (30 Teeth / 3 Groove) (1.500"ID) (Countershaft)	1	
80816	Gear, PX4B/APXA/APX4 Reverse (43 Teeth) (Countershaft) (Cast # PX4)	1	
80816A	Gear, MP1A/MPXA Reverse (Countershaft) 43 Teeth (Cast # PX4Y)	1	
80816AA	Gear, AOYA/BOYA/MPJA/MPOA/A6VA Reverse (43 Teeth) (Countershaft) (Cast # POX)	1	
80818	Gear, PX4B/APXA/APX4/MP1A/MPXA Reverse Idler (27 Teeth / .590" Thick)	1	
80818A	Gear, AOYA/A6VA/BOYA/MPJA/MPOA Reverse Idler (27 Teeth / .500" Thick)	1	
80819	Pin, PX4B/APXA/APX4/MP1A/MPXA Reverse Idler (1.760" Long) (.550"OD) (No O-Rings Grooves)	1	
80819A	Pin, AOYA/A6VA/BOYA/MPJA/MPOA Reverse Idler (1.705" Long) (.590"OD) (With 2 O-Ring Grooves)	1	
80820	Bracket, PX4B/APXA/APX4/MP1A/MPXA Reverse Idler (.550"ID) (2 Hole Flange)	1	
80820A	Bracket, AOYA/A6VA/BOYA/MPJA/MPOA Reverse Idler (.580"ID)	1	
80820AA	Bracket, PX4B/APXA/APX4/MP1A/MPXA Reverse Idler (.550"ID) (3 Hole Flange)	1	
80830	Selector, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Reverse (Countershaft)	1	
80835	Hub, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Reverse Selector (Countershaft)	1	
80840	Shift Fork, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPOA/MPXA (Cast # X4)	1	
80850	Cushion, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (.075") 1st/2nd/3rd/4th And 1st Hold Clutch	1	
80850A	Cushion, PX4B 1st Clutch (.050")	1	
80861	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Pressure Plate In All Drums	1-5	
80862	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Clutch Retainer In All Drums	1-5	
80870	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Bearing In Stator (Front)	1	
80879	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Caged Bearing # 214 To Mainshaft	1	
80880	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Mainshaft Bearing To Case (Use 60884CA)	1	
80881	Wire Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Mainshaft	1	
60884CA	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Secondary Shaft Bearing To Case (Also Fits Mainshaft Bearing To Case)	1-2	
80886A	Wire Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Retainer # 269 To Countershaft	1	
80887	Split Washer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA (Horse Shoe Clips) Secondary Shaft (Also Fits AOYA/BOYA/MP1A/MPJA/MPXA Countershaft) (2 Per Pack)	1-2	
80888	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Race # 239 To Secondary Shaft	1	
80889	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Secondary Shaft Bearing To Case (Use 60884CA)	1	
80890	Snap Ring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA Holds Countershaft Bearing To Case	1	
80900	Servo Assembly, PX4B (Cast # PX4 On 4th Accumulator Cover & PX4 On Secondary Valve Body)	1	
80900-2	Detent Assembly, PX4B/AOYA/APXA/APX4/BOYA/MP1A/MPJA/MPXA (Servo) Bolts To Servo With 2 Detents For Servo Rod (Aluminum)	1	
80900A	Servo Assembly, APXA (Cast # PX4Z On 4th Accumulator Cover & PX4 On Secondary Valve Body) Has Detent In Main Valve Body	1	
80900AA	Servo Assembly, AOYA/BOYA/MPJA (Cast # POX Or POXA On 4th Accumulator Cover & POX On Secondary Valve Body)	1	
80900AB	Servo Assembly, MP1A/MPXA (Cast # PX4Z On 4th Accumulator Cover & PX4 On Secondary Valve Body) (No Detent In Main Valve Body)	1	

FWD 4 Speed

PX4B / AOYA / APXA / APX4 / A6VA / BOYA / MP1A / MPOA / MPXA / MPWA (Accord)

HONDA

80924.....	Regulator, PX4B/APXA/APX4/MP1A/MPXA (Cast # PX4 On Regulator & Cast # PX4P On Throttle Body).....	1
80924A.....	Regulator, AOYA/A6VA/BOYA/MPJA/MPOA (Cast # POX On Regulator And Throttle Body).....	1
80925.....	Accumulator, PX4B/APXA/APX4/MP1A/MPXA (3 3/8" Tall).....	1
80925A.....	Accumulator, AOYA/A6VA/BOYA/MPJA/MPOA (3 3/4" Tall).....	1
80960.....	Piston, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1st/2nd/3rd/4th & 1st Hold Clutch.....	1-5
80970.....	Spring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1st/2nd/3rd/4th Clutch Return.....	1-4
80974.....	Beveled Spring, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1st Hold Clutch Return.....	1
80980.....	Retainer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1st/2nd/3rd/4th Clutch Spring.....	1-4
80984.....	Retainer, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA 1st Hold Clutch Spring.....	1
80991.....	Shift Rod, APXA / PX4B (12 5/16" Long) (No Rooster Comb).....	1
80991A.....	Shift Rod, AOYA/A6VA/BOYA/MPOA (12 5/16" Long) (Welded On Rooster Comb).....	1
80991AA.....	Shift Rod, MP1A/MPXA (12 5/16" Long) (Rooster Comb Held On By A Pin).....	1
80991AB.....	Shift Rod, MPJA (13 3/8" Long).....	1
80995.....	Park Pawl Assembly, PX4B/AOYA/APXA/APX4/A6VA/BOYA/MP1A/MPJA/MPOA/MPXA.....	1
80995-2.....	Pin, APXA Park Lock Pin (3 1/8" Long).....	1
80995-6.....	Park Lock Assembly, PX4B/MP1A/MPXA (Steel Fork, Spring, 2 Pins).....	1
80995-6A.....	Park Lock Assembly, AOYA/A6VA/BOYA/MPJA/MPOA (Aluminum Fork, Springs, 2 Pins).....	1
80996.....	Fitting, AOYA/APXA/BOYA/MP1A/MPJA/MPXA/PX4B Cooler Line (1 1/2" Long) Holds Cooler Line To Bell.....	1
80996A.....	Fitting, AOYA/APXA/BOYA/MP1A/MPJA/MPXA/PX4B Cooler Line (4 5/8" Long) Holds Cooler Line To Bell.....	1
80999.....	Tube Set, PX4B/AOYA/APXA/APX4/BOYA/MP1A/MPJA/MPXA Cooler Line (3 Piece).....	1

